



Perpendicular Garden Hose Reel Assembly Instructions

Model GH150-PD

Material you'll need:
7/16" wrench
Drill
Hardware to mount reel




1 Mark mounting holes for wall plate.



2 Drill pilot holes.



3 Align wall plate with holes and tighten bolts. (Hardware not included)



4 Mount Hose Reel




5 Attach handle to flange assembly.



6 Feed garden hose through slot.



7 Make a large smooth loop. Do not bend or kink hose.



8 Place hose clamp on reel.



9 Tighten hose clamp to reel and reel in hose.

Warranty Registration for Model GH 150-PD

Serial # (found on hose reel) _____

1) Month and year purchased ____ / ____

2) Was this a gift? ____ Yes ____ No

3) Purchased from:

- ____ Farm store
- ____ Auto parts store
- ____ Wholesale club
- ____ Mail order catalog
- ____ Tool distributor
- ____ Home center/hardware store
- ____ Internet/website

4) How did you find out about this product?

- ____ Store flyer/display
- ____ Mail order catalog
- ____ Magazine ad
- ____ Newspaper ad
- ____ Word of mouth
- ____ Internet/website

5) Did you consider other brands prior to purchasing this reel? ____ Yes ____ No

6) Where will the reel be used most?

- ____ Mechanic shop
- ____ Body shop
- ____ Farm shop
- ____ Auto dealer
- ____ Service station/tire center
- ____ Home (garage, shop, etc.)
- ____ Marina
- ____ Aviation
- ____ Construction
- ____ Heavy equipment shop
- ____ Woodworking
- ____ Manufacturing
- ____ Public transportation
- ____ Other (please list) _____

Name _____

Address _____

City _____ State _____

Zip _____

E-mail address _____

**Thank you for purchasing a
Rapid Reel hose reel.
Your satisfaction is important to
us. You can reach our courteous
and knowledgeable
customer service staff at:
1.800.523.4321**


**or
customerservice@reelquick.com
www.reelquick.com**

**Reel Quick, Inc.
PO Box 22640
Lincoln, NE 68542-2640**



GH150-PD Perpendicular Wall Mount

Specialists in Hose Reel Solutions

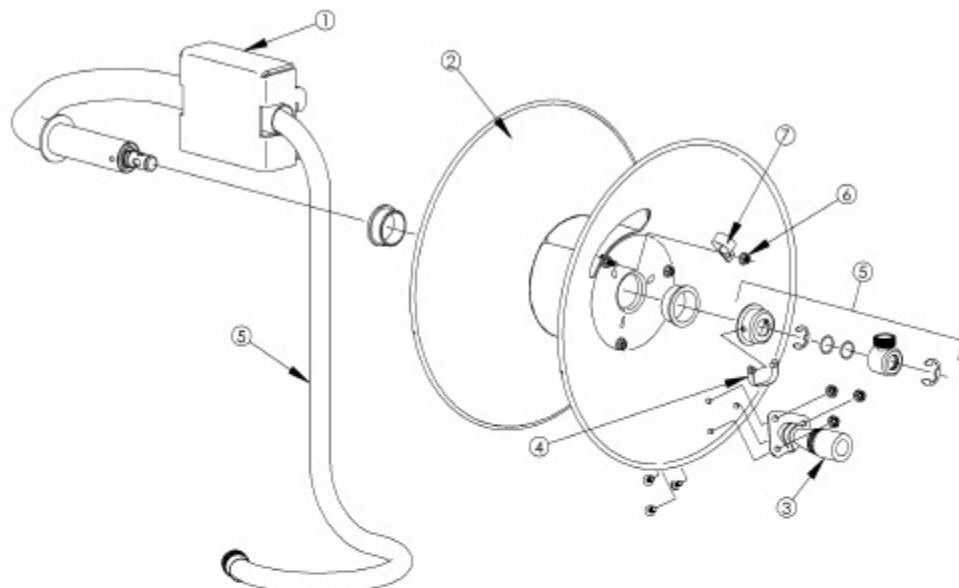

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	5001.090	Perpendicular Wall Mount
2	1	9001.003	Flange Assembly 16
	2	4202.012	Bushing Axle
3	1	5001.027	Handle Assembly
	3	4102.003	Nut 1/4-20 SFL
	3	4101.004	Pan Head Screw 1/4"
4	1	4209.012	Snap Button Double
5	1	2005.003	GH Hose and Swivel Assembly 76"
	1	4301.104	Garden Hose Jumper Assy .75 x 76 inch
	1	4201.028	Hose Washer
	1	5004.102	3/4" Housing Soldered
	1	4201.026	E- Ring E-75
	1	4201.020	E- Ring .875
	1	4201.016	Rotor Cap .88
	2	4201.029	O18 O Ring
6	1	4102.003	Nut 1/4-20 SFL
7	1	9905.013	Hose Clip .88 Dia.

Model GH150-PD Specification

- Maximum Pressure 225 psi
- Maximum Capacity 100 ft. of 3/4" ID hose
150 ft. of 5/8" ID hose
250 ft. of 1/2" ID hose
- Maximum Temp. 100°F
- Weight 24 lbs.

WARRANTY

Rapid-Reel® or Reel Quick, Inc. (collectively here after referred to as the "warrantor") will repair or replace this product, free of charge, for a period of 2 years (24 months) from the date of original purchase in the event of defect, malfunction or failure due to material or workmanship. This warranty does not cover damage which occurs in shipment or failures which are caused by products not supplied by the warrantor or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, faulty installation, or service by anyone other than warrantor or damage that is attributable to acts of God.

In no event shall the warrantor or its suppliers be liable for any damages, whatsoever, arising out of the use of or inability to use this product. (Some states do not allow the exclusion of limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.) The warrantor and its suppliers disclaim all other expressed or implied warranties. Some state do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.



WARRANTY SERVICE CENTER
PO Box 22640
LINCOLN NE 68542-9936

